WUG2690

802.11b/g Wireless LAN USB 2.0 Adapter

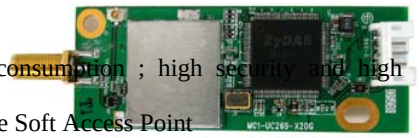

Introduction

A wireless LAN links network users to LAN services without the hassle of cabling or wiring, which significantly brings mobile workers the freedom of staying connected to the network while roaming around a building or multiple buildings maintaining access to the Internet, e-mail, networked applications, and print services.

This device is the perfect solution for your wireless network applications based on the **IEEE 802.11b/g** standard that offers a data rate up to **54Mbps** in a wireless LAN environment. It is a high-speed wireless network card that plugs into your system and accesses to the LAN or peer-to-peer networking easily without wires or cables. No matter where it allows you to share printers, files, and other network resources.

Features

- Compliant with IEEE802.11b/g standard for 2.4GHz Wireless LAN
- USB 2.0 compliant
- USB Plug & Play
- Interoperable with existing network infrastructure
- Secure information transmission
- Freedom to roam while staying connected
- Compatible with specialty wireless products and services
- Up to 54 Mbps data rate
- Low power consumption ; high security and high performance.
- Free inside the Soft Access Point
- Support English, Japanese, Simplified_Chinese, Traditional_Chinese

Specifications

Power Requirement

- Operating Voltage: 5V DC
- TX consumption: 250 mA (Max)
- RX consumption: 160 mA (Max)

Physical specification

- Weight: 8 g
- Dimension: 67.67(L) x 25.02(W) x 5.4(H) mm

Supported OS

- Windows 2000
- Windows XP
- Windows ME
- Windows 98SE

Downloaded from www.Manualslib.com manuals search engine

WUG2690
802.11b/g Wireless LAN USB 2.0 Adapter

WIRELESS SPECIFICATION

Standard	IEEE 802.11b/g
Host Interface	USB 2.0
Antenna Connector	One SMA connector and one I-Pex connector
Frequency Range	2.412GHz ~ 2.4835GHz
Number of Selectable Channels	USA, Canada: 11 channels Europe: 13 channels Japan: 14 channels
Modulation Technique	Direct Sequence Spread Spectrum (CCK, DQPSK, DBPSK) Orthogonal frequency division multiplexing(OFDM)
Security	64/128/256-bit WEP Encryption and Wi-Fi Protected Access, AES-CCM, TKIP
Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK
Output power	11g: 13 dBm 11b: 16 dBm
Data Rate	802.11g(54 Mbps, 48 Mbps, 36 Mbps, 24 Mbps, 18 Mbps, 12 Mbps, 9 Mbps, 6 Mbps) 802.11b(11 Mbps, 5.5 Mbps, 2 Mbps, 1 Mbps)
Throughput	21.5Mbps @ 54Mbps 5.9Mbps @ 11Mbps
Sensitivity	-68 dBm@54Mbps -85 dBm@11Mbps

Downloaded from www.Manualslib.com manuals search engine